


DUAL INTRODUCES THE...

TOUGHEST MOTHER AROUND!

FOR IEEE-696/S-100 SYSTEMS

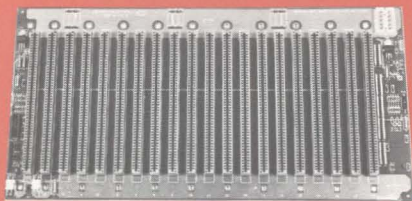

M/BD-20

A HIGH SPEED, MULTI-LAYER 20-SLOT BACKPLANE WITH RELIABLE FEATURES:

- ❑ **TWO INTERNAL GROUND PLANES** provide exceptionally low noise and true transmission line characteristics.
- ❑ **SCHOTTKY DIODE TERMINATION** on critical strobe lines prevents undershoot more effectively than conventional resistive termination.
- ❑ **VERY HIGH QUALITY, LOW INDUCTANCE CONNECTORS** allow extremely low noise operation, unsurpassed durability under frequent card insertions and high retention force.
- ❑ **PULL-UPS ON TRI-STATE AND OPEN COLLECTOR LINES** guarantee a default to logic 1 state.
- ❑ **DEBOUNCED RESET SIGNAL** provided on board.
- ❑ **TWENTY IEEE-696/S-100 SLOTS** on 0.75-inch centers with standard mounting holes.
- ❑ **A BOARD THICKNESS OF 0.093** inches gives high rigidity.
- ❑ **USEFUL FRONT PANEL LED OUTPUTS** provided on the board.

M/BD-20 \$490


The S-100 bus can now be run faster and with more security than ever before. Call today for more information.

DUAL

DUAL SYSTEMS CORPORATION
2530 San Pablo Avenue • Berkeley
CA 94702 • (415) 549-3854 • 172029 SPX

THE ULTIMATE IEEE/S-100 MEMORY WOULD...

- ❑ **BE NONVOLATILE**, holding data for up to eight years with the power off.
- ❑ **RUN AT 6MHZ** without wait states.
- ❑ **HAVE EXTENDED 24-BIT ADDRESSING** and bank select.
- ❑ **HAVE DYNAMICALLY MOVABLE WRITE PROTECT AREAS** to prevent accidental erasure of programs and critical data.
- ❑ **GENERATE POWER-FAIL** interrupts for orderly system shutdown & power failure recovery.

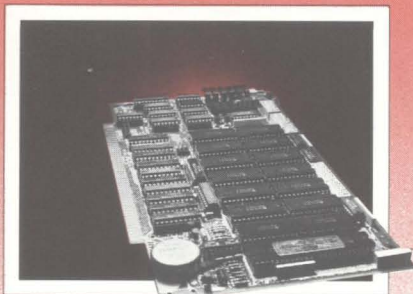

CMEM

AVAILABLE NOW FROM DUAL SYSTEMS, the CMEM memory boards combine high-speed CMOS memories with a new 5-8 year lithium battery. The CMEM offers the nonvolatility of an EPROM board while retaining the instant writability of a high-speed read/write RAM. These industrial grade boards are subjected to a 168-hour burn-in and a 1000-cycle power interruption test to insure data retention and the highest degree of reliability possible.

CMEM-32K, 32K Bytes \$695
CMEM-16K, 16K Bytes \$595
CMEM- 8K, 8K Bytes \$495


PRICES SLASHED!

DUAL

DUAL SYSTEMS CORPORATION
2530 San Pablo Avenue • Berkeley
CA 94702 • (415) 549-3854 • 172029 SPX

THE ULTIMATE IEEE-696/S-100 MULTI-USER SERIAL I/O CARD WOULD BE...

- ❑ **DMA DRIVEN**—Designed with fast, direct memory access for all output transfers.
- ❑ **POWERFUL**—256 character FIFO input buffer allows simultaneous high-speed traffic on all channels without any lost characters.
- ❑ **SMART**—On-board 8085 micro-processor off-loads the 68000 cpu.

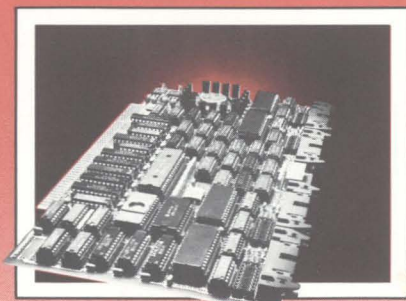

SIO4-DMA

- ❑ **FLEXIBLE**—Four RS-232C serial channels, each individually configurable as either DCE or DTE.
- ❑ **SOLID AND RELIABLE**—Each board is dynamically burned-in for 168 hours to insure stable performance.

AND WOULD...

- ❑ **HAVE SOFTWARE PROGRAMMABLE BAUD RATES** of 50 to 38,400 Baud on each channel.
- ❑ **INCREASE THROUGHPUT** significantly in multi-user configurations.

The SIO4-DMA has been field proven in DUAL's System 83, a 68000/UNIX®, multi-user, multi-tasking system.

SIO-4-DMA \$695

*UNIX is a trademark of Bell Laboratories

DUAL

DUAL SYSTEMS CORPORATION
2530 San Pablo Avenue • Berkeley
CA 94702 • (415) 549-3854 • 172029 SPX