


OCT 30 1978



Floppy Drive Model 144M

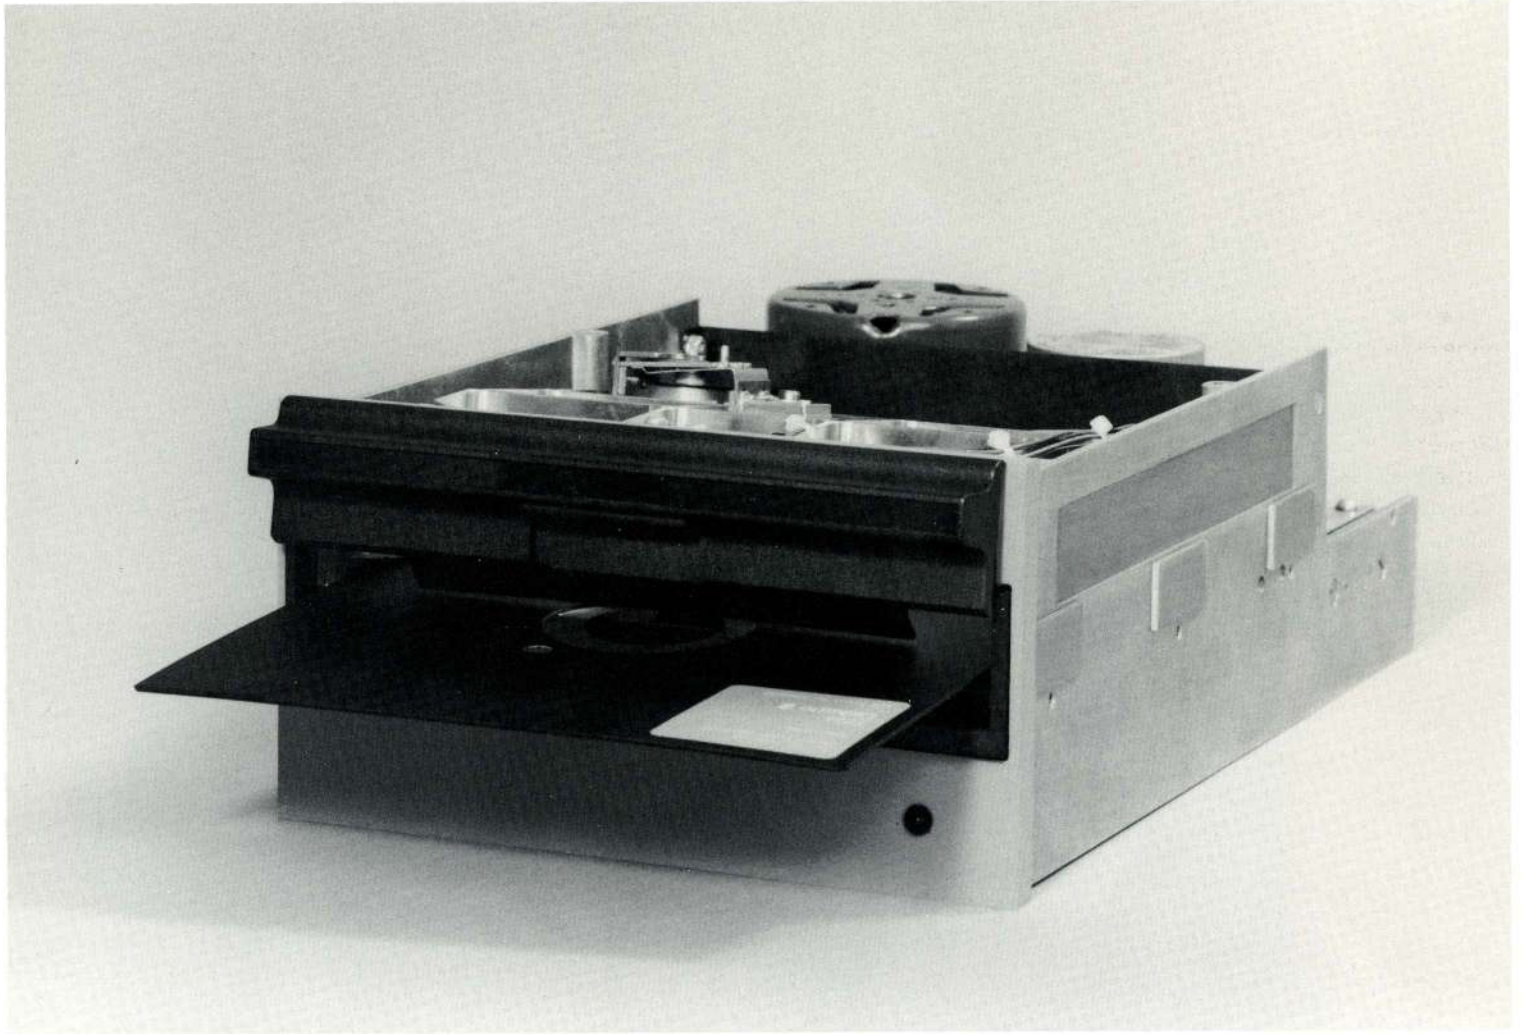

The Model 144M is the latest generation of CalComp's line of Floppy Disk Drives. It features performance advantages, coupled with reliability and flexibility, packaged in a unit that can be incorporated easily into a wide variety of systems designs. Capable of two-sided, double density operation, the 144M Drive stores up to 1.6 Megabytes of unformatted data.

The 144M Drive is form, fit and function-compatible with many contemporary floppy drives, and offers the following significant advantages to the OEM designer and user:

- **Both Hard and Soft Sector Capabilities** in every drive provide system design flexibility.
- **High Performance Band Positioner** provides 3 msec track-to-track access time and accurate positioning.
- **Superior Read/Write Margins** eliminate the requirement for write precompensation in the controller.
- **Only Two DC Voltages (+5 VDC and +24 VDC)** eliminate the need for -5 VDC, reducing power supply requirements.
- **Switch and Jumper Selectable Features** available in the standard drive provide over 40 no-cost options.
- **Mounts in 3 Planes without Any Readjustments**, adding flexibility in system design.
- **Mounts in Standard 19-inch RETMA Rack**, easing cabinet design considerations.
- **Overlapping Seeks Capability** increases data throughput.
- **Instantaneous Speed Variation of $\pm 1\%$** enhances data reading and writing accuracy.

Write Protect, Activity Light and a choice of domestic and international power options are also included. The only feature not available in the standard unit is an optional programmable door lock.

Fully compatible with IBM formats (3740, System 32, Series 1, and System 34) the 144M can use both Modified Frequency Modulation (MFM or M²FM) for double density applications and Double Frequency Modulation (FM) for single density applications.

Up to four 144M Drives can be connected in radial (parallel) or daisy chain (series) configurations, and each drive can be individually addressed for drive select and head load functions.

The 144M incorporates the half-decade of experience gained by CalComp, a pioneer in floppy disk technology, and is supported by a full range of services, including factory repair, training, and documentation as well as a variety of accessory items.

The 144M Floppy Disk Drive offers the OEM community and drive user a wide choice in features and an uncommon choice in capabilities.

Specifications and Characteristics

<i>Unformatted Capacity (Double Density)</i>	
Per Flexible Disk:	12.8 Mbits (1.6 Mbytes)
Per Track:	83 Kbits (10 Kbytes)
<i>Unformatted Capacity (Single Density)</i>	
Per Flexible Disk:	6.4 Mbits (802 Kbytes)
Per Track:	41.6 Kbits (5.2 Kbytes)
<i>Hard Sector Format Capacity (Double Density)</i>	
Per Flexible Disk:	10.4 Mbits (1.3 Mbytes)
Per Track:	67.6 Kbits (8.4 Kbytes)
Per Sector:	2112 bits (264 bytes)
<i>IBM 3740 Format Capacity</i>	
Per Flexible Disk:	4.0 Mbits (512 Kbytes)
Per Track:	26.6 Kbits (3.3 Kbytes)
Per Sector:	1 Kbit (128 bytes)
<i>Data Transfer Rate</i>	
500 Kbits per second (double density)	
250 Kbits per second (single density)	
<i>Densities</i>	
Bit Density (Inside Track):	6.8 Kbits per inch
Track Density:	48 Tracks per inch (0.013"/0.0308 mm data track width)
<i>Number of Cylinders</i>	
77 (154 tracks)	
<i>Number of Read/Write Heads</i>	
2	
<i>Coding Technique</i>	
Modified Frequency Modulation (MFM or M ² FM)	
Double Frequency Modulation (FM)	
<i>Rotational Speed</i>	
360 rpm $\pm 2.5\%$ (167 msec/rev.)	
<i>Average Latency</i>	
83 msec	
<i>Positioning Times</i>	
Access:	3 msec track-to-track
Head Stabilization:	15 msec
Head Load:	35 msec
Motor Start Time to Ready:	2.5 seconds max.
<i>Positioning Mechanism</i>	
Stepping Motor:	Magnetic Detent, Band Positioner
<i>Media</i>	
IBM Part No. 2305830 (Single Sided)	
IBM Part No. 2736700 (Dual Sided)	
<i>Physical Dimensions</i>	
4.62" high x 9.5" wide x 14.25" deep	
117.3 mm high x 241.3 mm wide x 362 mm deep	
<i>Weight</i>	
Operating:	13 pounds (5.9 kg)
Shipping:	15 pounds (6.8 kg)
<i>Reliability</i>	
Read Error (Soft):	Less than 1 in 10 ⁹ bits
Read Error (Hard):	Less than 1 in 10 ¹² bits
Positioning Errors:	Less than 1 in 10 ⁶ accesses
MTBF:	Designed to exceed 8,000 hours
MTTR:	Less than 30 minutes
Product Life:	5 years or 30,000 hours
<i>Power Requirements</i>	
90-110 VAC, 50Hz, 1.1 amps	
90-127 VAC, 60Hz, 1.2 amps	
187-264 VAC, 50Hz, 0.3 amps	
DC: +24v, 0.07 amps; +5v, 1.8 amps (nominal)	
<i>Drive Environmental Requirements</i>	
Operating Temperature:	50° to 110°F (10° to 43.3°C)
Maximum Gradient:	20°F (11.1°C) per hour
Humidity:	20% to 80% [85°F (30°C) max. wet bulb]
<i>Heat Dissipation</i>	
275 BTU/hour max.	

Memory Products Division

U.S. Sales Offices *

Texas
13610 Midway Road, Suite 240
Dallas, TX 75240
Phone 214/387-0902
TWX 910-591-1154

New York
550 Old Country Road
Hicksville, NY 11801
Phone 516/938-7258
TWX 910-591-1154

Southern California
1717 Orangewood Avenue
Suite H
Orange, CA 92668
Phone 714/997-8780
TWX 910-591-1154

Northern California
3255 Scott Boulevard, Suite 7-C
Santa Clara, CA 95052
Phone 408/249-9182
TWX 910-591-1154

Southeast
1540 Highland Avenue
Vero Beach, FL 32960
Phone 305/567-5700
TWX 910-591-1154

New England
470 Totten Pond Road
Waltham, MA 02154
Phone 617/890-4850
TWX 910-591-1154

**In addition there are many local sales representatives. Contact CalComp for the one near you.*

International Sales Offices

CalComp S.A.
43 rue de la Breche-Aux-Loups
Paris 75012, France
Phone: 345-4974
Telex: (842) 68684

CalComp GmbH
Wertstrasse 37
4000 Dusseldorf 11
West Germany (F.R.G.)
Phone: 0211-501193
Telex: (841) 8584661

CalComp B.V.
Maalderij 21
P.O. Box 444
Amstelveen, The Netherlands
Phone: 020-457351
Telex: (844) 12599

CalComp Ltd.
Cory House
The Ring
Bracknell, Berks U.K. RG12 1ER
England
Phone: 0344-50211
Telex: (851) 848949

CalComp S.p.A.
Via Farnese 1
20146 Milan, Italy
Phone: 498-3341
Telex: (843) 39643

CalComp Pacific, Inc.
Azabu Bldg.
3-5-27, Roppongi
Minato-ku, Tokyo 106
Japan
Phone: 03/585-7101/02/03
Telex: (781) 26242

CalComp Canada
55 Westmore Drive
Rexdale, Ontario, M9V 3Y6
Phone: (416) 745-9610

CALCOMP

California Computer Products, Inc.
Small Disk Operation
3320 East La Palma Boulevard, Anaheim, California 92806
Telephone: (714) 632-5461 Telex: 655-437